

SPECIFICATIONS

MODEL NUMBER	POWER	BORE	STROKE	RAM SPEED		CAPACITY (TONS)	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
				PRESS	RETURN			L	W	H
HFP-20	1.5 HP 1 phase	4"	12"	10 IPM	13 IPM	20	400	34"	40"	52"

115V 13.4 AMPS
230V 6.7 AMPS

H FRAME PRESS BENCH MODEL 20 Ton

STANDARD FEATURES


- ✓ **Electric / Hydraulic operation** provides smooth, consistent pressing action.
- ✓ **Open sides** to facilitate work on long pieces.
- ✓ **Flat ram nose** can be easily changed to allow the user to adapt the press to a specific job.
- ✓ **Low speed pump** - quiet, dependable operation.
- ✓ **Double-acting cylinder** permits pulling as well as pressing ram action.
- ✓ **Cylinder activation** is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- ✓ **3 GAL.** hydraulic oil reservoir.
- ✓ **Low pressure** hydraulic system maintains lower oil temperatures, resulting in higher efficiency and safer operation.
- ✓ **All hydraulic and mechanical parts are standard** in the industry, and available throughout North America.

AVAILABLE OPTIONS

- VB-20 V BLOCKS** matched pair.
- PR-20 Pressure regulator** to limit the ram pressure.
- FSG-20 Front safety guard** for operator protection.

DIMENSIONS (INCHES)

MODEL	A	B	C	D	E	F
HFP-20	36	24	34	12	7	24

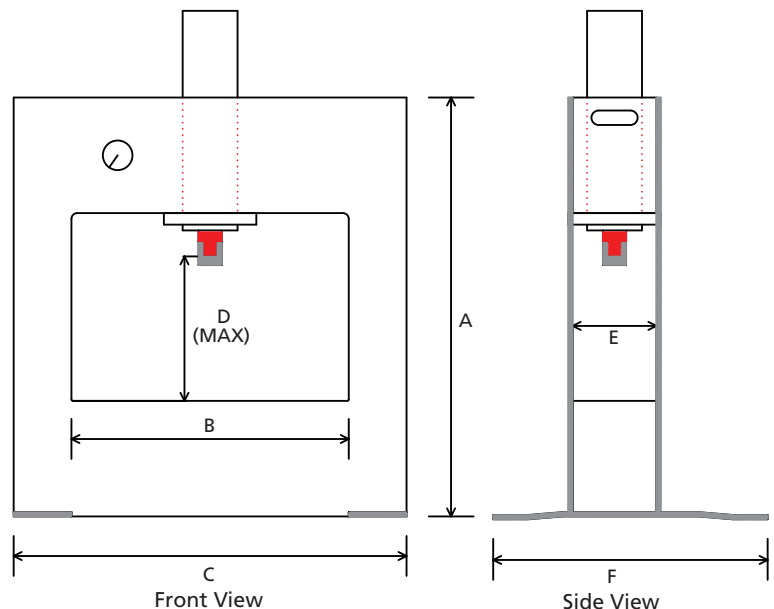

Custom designs available
We Build Them your Way!