

PRESS MASTER



SPECIFICATIONS

MODEL NUMBER	POWER	BORE	STROKE	RAM SPEED		CAPACITY (TONS)	WEIGHT (LBS.)	SHIPPING DIMENSIONS		
				PRESS	RETURN			L	W	H
HFP-50	5 HP 230 1 phase	6"	12"	20 IPM	24 IPM	50	1,200	48"	62"	88"

Standard voltages available - please specify when ordering.


H FRAME PRESS 50 Ton

STANDARD FEATURES

- ✓ **Electric / Hydraulic operation** provides smooth, consistent pressing action.
- ✓ **Open sides** to facilitate work on long pieces.
- ✓ **Flat ram nose** can be easily changed to allow the user to adapt the press to a specific job.
- ✓ **Quality Baldor motor**, low speed.
- ✓ **Low speed pump** - quiet, dependable operation.
- ✓ **Self-locking table design** eliminates lateral movement.
- ✓ **Double-acting cylinder** permits pulling as well as pressing ram action.
- ✓ **Hydraulic power-lift** for vertical displacement of table.
- ✓ **Cylinder activation** is fingertip controlled, the more the hand lever is engaged the more the ram movement is accelerated. This allows the operator to control the proper speed for the task.
- ✓ **High capacity** 10 GAL. hydraulic oil reservoir.
- ✓ **Low pressure hydraulic system** maintains lower oil temperatures, resulting in higher efficiency and safer operation.

DIMENSIONS (INCHES)

MODEL	A	B	C	D	E	F
HFP-50	76	42	54	35	10	30

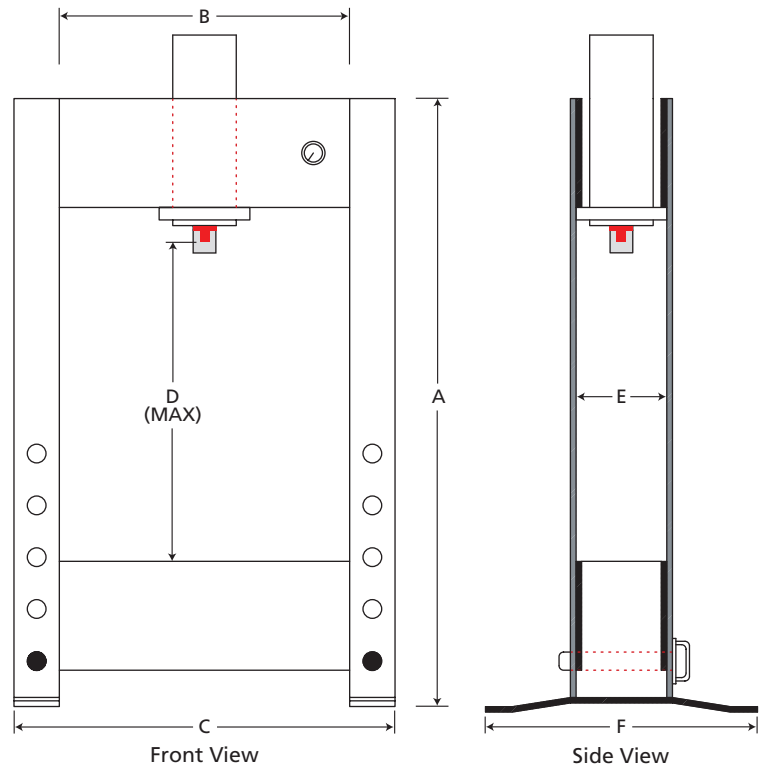

AVAILABLE OPTIONS

- VB-50 V BLOCKS** matched pair.
- PR-50 Pressure regulator** to limit the ram pressure.
- FSG-50 Front safety guard** for operator protection.
- FPS-50 Foot pedal-electric solenoid valve** for hands-free operation, c/w electric control panel.
- ASC-50 Adjustable stroke control** c/w foot pedal-electric solenoid valve and electric control panel.
- 6-18 18 Inch** stroke cylinder.
- 6-24 24 Inch** stroke cylinder.

Custom designs available
We Build Them your Way!