

PRESS MASTER




MODEL NUMBER	KEY	CFP-20	CFP-50
Tons of force (maximum)		20	50
Approach speed (inches per minute)		186	181
Press speed (inches per minute)		44	31
Return speed (inches per minute)		269	219
Table (left to right)	A	21	26
Table (front to back)	B	16	20
U-Slot width	C	4	4
Daylight	D	18	18
Maximum stroke (adjustable)	E	12	12
Throat	F	11	13
Floor to table	G	36	36
Front to back	H	46	58
Height (overall)	I	87	89
Width	J	26	31
Clearance	K	6	6
Upper platen (left to right)	L	21	26
Upper platen (front to back)	M	16	20
Motor HP @ 1750 RPM		5 HP	10 HP
Voltages available		230 / 460 / 575 3 PH. 60 HZ.	

C FRAME PRESSES 20 / 50 TON

STANDARD FEATURES

- ✓ Pressure gauge.
- ✓ Pressure regulator.
- ✓ Adjustable speed control.
- ✓ Adjustable stroke control.
- ✓ Pressure reversal switch.
- ✓ Ram travel is guided by 4 precision-ground chromed rods.
- ✓ Jog mode used for simplifying setups.
- ✓ Dual Control - your choice of using:
 - (1) Moveable pedestal c/w dual electric palm buttons & extra emergency stop or
 - (2) Foot pedal.
- ✓ P.L.C. programmable control system.
- ✓ Quality BALDOR motor, low speed.
- ✓ Air-Cooled industrial oil cooler.
- ✓ All hydraulic and mechanical parts are standard in the industry, and available throughout North America.

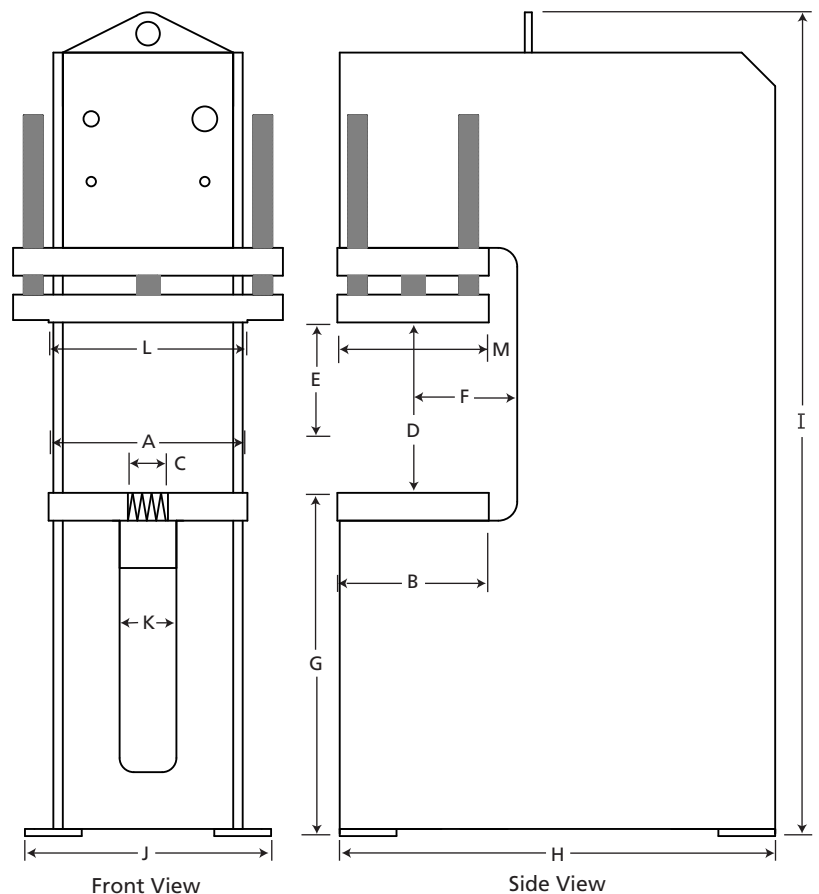

MODEL	WEIGHT (LBS.)	SHIPPING DIMENSIONS L x W x H
CFP-20T	4,000	54" 50" 94"
CFP-50T	6,600	66" 52" 96"